


TECHNICAL DATA AND ACCESSORIES MULTICHARGER IN 2X12A - 2X20A - 2X35A



MultiCharger	2 x 12 A	2 x 20 A	2 x 35 A
Item No.	705300	705900	704700
Mains Voltage VAC	230 V	230 V/50-60	230 V/50-60
Operating temperature	-35 bis + 50 °C	-35 bis + 50 °C	-35 bis + 50 °C
Charging voltage* S1 VDC	14,4	14,4	14,4
Float voltage S2 VDC	13,5	13,5	13,5
Charging current A	2 x 12	2 x 20	2 x 35
Battery size Ah	2 x 150	2 x 250	2 x 600
IP-rate	44	44	44
Weight kg	1	3	3
Height/Width/Depth mm	138 x 201 x 53	182 x 190 x 53	200 x 190 x 53
Certifications	EN60335-1, EN60335-2-29, EN55014-1, EN55014-2, EN61003-3/2		

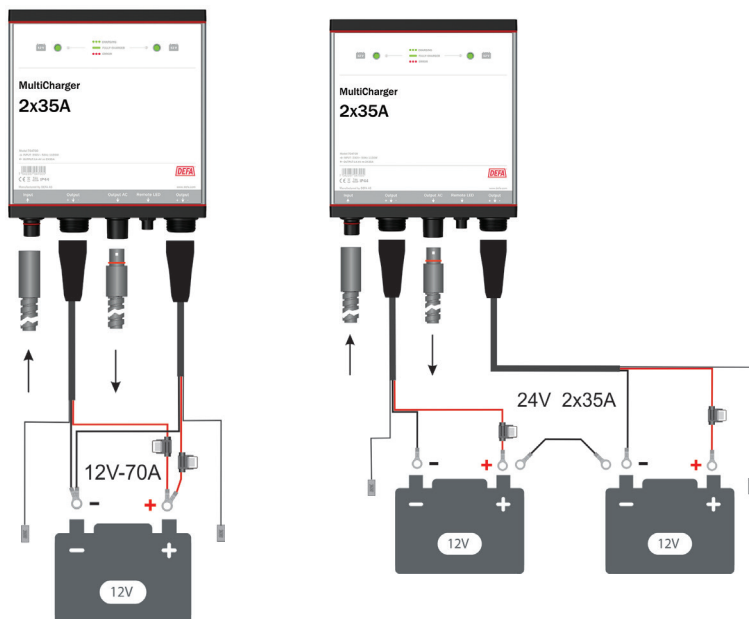

Accessories MC 2 x 20 A	
706483	2 m Charging cable
706484	4 m Charging cable
706485	6 m Charging cable
705294	5 m Remote Panel
705295	10 m Remote Panel
705296	20 m Remote Panel
705297	25 m Remote Panel
705463	Connection Schuko-Plug

Accessories MC 2 x 35 A	
705099	Charging cable
705147	4 m Charging cable
705159	6 m Charging cable
705160	8 m Charging cable
705294	5 m Remote Panel
705295	10 m Remote Panel
705296	20 m Remote Panel
705297	25 m Remote Panel
705463	Connection Schuko-Plug